



The BroadWeigh BSue base station is provided with a rugged IP65 housing and an increased range of 800 m (2600 ft)

Introduction

The BroadWeigh extended range base station (BW-BSue) offers line of sight range of up to 800 metres for all BroadWeigh acquisition modules. It draws power from the USB bus and therefore no further components are required to configure and control remote devices from a PC.

Specification at a Glance

- Provides wireless data acquisition to PC's from the BroadWeigh shackles
- Configures any BroadWeigh telemetry module via USB connection
- Powered from USB
- Up to 800 m (2600 ft) range
- IP65 / NEMA 4 rated enclosure dimensions 59 x 76.6 x 29 mm




User Benefits

- Up to 800 m (2600 ft) range
- Simple plug & play USB
- Configure the BroadWeigh range
- IP65 / NEMA 4 rated enclosure

Ideal Application

- Theatre & Events
- Outdoor Events
- Concerts
- Conferences / Trade Shows

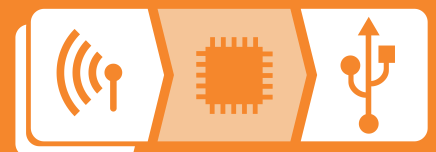

Related Products



BW-HR Handheld Wireless Display
LCD reading from an unlimited number of BroadWeigh shackles



BW-WSS
Wireless wind speed sensor



BW-S325 & BW-S475 Shackles
BroadWeigh wireless Crosby Safety Bow Shackles



BW-AR
Active repeater to extend wireless range or coverage

Related Software



BW-Toolkit
Software used to calibrate and configure your devices



BW-LOG100
Free data logging software package for advanced monitoring up to 100 channels

Case Study


The Application:

Fire curtains are a key part of fire safety in any theatre and the ability to rapidly drop-in and pull-out the curtain not only offers safety to audience members in case of fire but also the facility to reset the curtain quickly in case of false triggering with minimal disruption to a performance. Fire curtains by their nature are very heavy and understanding the dynamic loading effects of moving such a weight at speeds is critical to designing an effective hoist system.

The Solution:

In order to understand the loads involved in moving the fire curtain, a BroadWeigh shackle was rigged into the hoist line of the curtain.

The BroadWeigh shackle was set to transmit readings at a rate of 50 samples per second, to capture peak loads, and the data from the shackle was collected through a BSue USB base station attached to a PC running display and logging software. The data could be simultaneously viewed on the handheld provided in the kit.

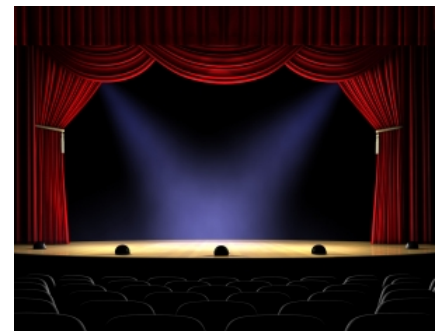

CE & Environmental

Storage temperature	- 40 to +85°C
Operating temperature	- 40 to +85°C
Relative humidity	95% maximum non condensing
IP Rating	IP65 / NEMA 4 (not USB plug end)

CE Environmental Approvals

European EMC Directive	2004/108/EC
Low Voltage Directive	2006/95/EC

For more information contact us today...

www.broadweigh.com
info@broadweigh.com
Devon, EX5 2JB, UK
T: +44 (0) 1395 232020
F: +44 (0) 1395 233190



In the interests of continued product development, Mantracourt Electronics Limited reserves the right to alter product specifications without prior notice